




Product Dimensions and Weights

DIN 582 Technical Specifications

Metric DIN 582 Lifting Eye Nuts

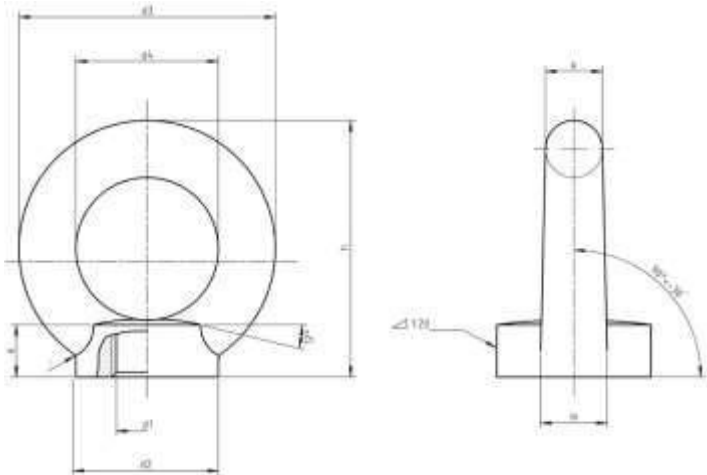

Dimensions of Metric DIN 582 Lifting Eye Nuts

Thread size d1	M8	M10	M12	M16	M20	M24	M30	M36	M42	M48	M56	M64	M72x6	M80x6	M100x6
d2	20	25	30	35	40	50	65	75	85	100	110	120	150	170	190
d3	36	45	54	63	72	90	108	126	144	166	184	206	260	296	330
d4	20	25	30	35	40	50	60	70	80	90	100	110	140	160	180
e	8.5	10	11	13	16	20	25	30	35	40	45	50	60	70	80
h	36	45	53	62	71	90	109	128	147	168	187	208	260	298	330
k	8	10	12	14	16	20	24	28	32	38	42	48	60	68	75
m	10	12	14	16	19	24	28	32	38	46	50	58	72	80	88
r	4	4	6	6	8	12	15	18	20	22	25	25	35	35	40
Weight kg/1pc	0.1	0.09	0.16	0.24	0.36	0.72	1.32	2.08	3.11	5.02	6.69	9.3	18.5	27.3	36.4



UNIQUE FASTENERS

Precision Fasteners, Built to Last
175/6 Sar Building, Sp Road, Bangalore, 560002



+91-8660813791



uniquefasteners.in



INFO@UNIQUEFASTENERS.IN



Metric DIN 582 Lifting Eye Nuts are fasteners with a female threaded end and a looped head at the other end. They are designed to receive a hook, rope or cable. Eye nuts are designed for lifting vertical loads, and not recommended for use with angular lifts. Eye nuts that are not load-rated are designed for use with tie downs and guiding wires. They are not rated for lifting applications. Unique Fasteners offers the following sizes for immediate delivery from stock: Diameters ranging from M6 to M36 available in A2 and marine grade A4 stainless steel.

DIN (**D**eutsches **I**nstitut für **N**ormung - German Institute for Standardization) standards are issued for a variety of components including industrial fasteners as metric DIN 582 Lifting Eye Nuts. The DIN standards remain common in Germany, Europe and globally even though the transition to ISO standards is taking place. DIN standards continue to be used for parts which do not have ISO equivalents or for which there is no need for standardization.