

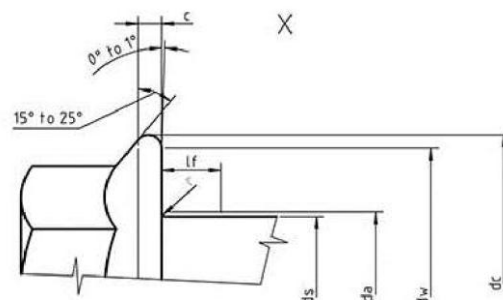




Product Dimensions and Weights

DIN 6921 Technical Specifications

Metric DIN 6921 Hexagon Flange Bolts

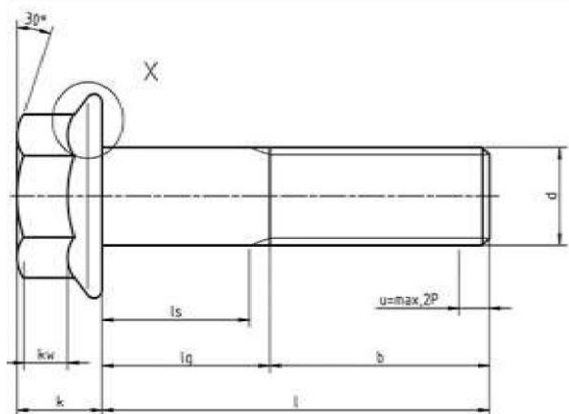

Dimensions of Metric DIN 6921 Hexagon Flange Bolts

Thread		M5	M6	M8	M10	M12	(M14)	M16	M20
size d		-	-	M8 x 1	M10 x 1.25	M12 x 1.5	(M14x1.5)	M16 x 1.5	M20 x 1.5
		-	-	-	(M10 x 1)	(M10 x 1.25)	-	-	-
P		0.8	1	1.25	1.5	1.75	2	2	2.5
C	Min.	1	1.1	1.2	1.5	1.8	2.1	2.4	3
	Max.	5	6	8	10	12	14	16	20
da	Min.	5.75	6.75	8.75	10.8	13	15.1	17.3	21.6
	Max.	11.8	14.2	17.9	21.8	26	29.9	34.5	42.8
dc	Max.	9.8	12.2	15.8	19.6	23.8	27.6	31.9	39.9
dw	Min.	8.79	11.05	14.38	16.64	20.03	23.36	26.75	32.95
e	Min.	6.2	7.3	9.4	11.4	13.8	15.9	18.3	22.4
h	Max.	4.7	5.7	7.6	9.6	11.6	13.3	15.3	18.9
m	Min.	2.2	3.1	4.5	5.5	6.7	7.8	9	11.1
m'	Min.	8	10	13	15	18	21	24	30
s	Nominal size = max.	7.78	9.78	12.73	14.73	17.73	20.67	23.67	29.16
	Min.	0.3	0.36	0.48	0.6	0.72	0.88	0.96	1.2
r	Max.								

[illegible]

GSTIN- 29ADMPC3767H1Z9



UNIQUE FASTENERS

Precision Fasteners, Built to Last
175/6 Sar Building, Sp Road, Bangalore, 560002



+91-8660813791



uniquefasteners.in



INFO@UNIQUEFASTENERS.IN



Metric DIN 6921 Hexagon Flange Bolts are machine threaded bolts that have a circular washer like flange under the head that increases the bearing surface to distribute the load when the bolt is fastened to the substrate. DIN 6921 Hexagon Flange Bolts are available with and without serrations. Unique Fasteners offers the following sizes for immediate delivery from stock: Diameters ranging from M5 to M12 and up to 150mm long and available in A2 and marine grade A4 stainless steel.

DIN (**D**eutsches **I**nstitut für **N**ormung - German Institute for Standardization) standards are issued for a variety of components including industrial fasteners as DIN 6921 Hexagon Flange Bolts. The DIN standards remain common in Germany, Europe and globally even though the transition to ISO standards is taking place. DIN standards continue to be used for parts which do not have ISO equivalents or for which there is no need for standardization.