




Product Dimensions and Weights

DIN 964 ISO 2010 Specifications

Metric DIN 964 Slotted Raised Countersunk (Oval) Head Machine Screws

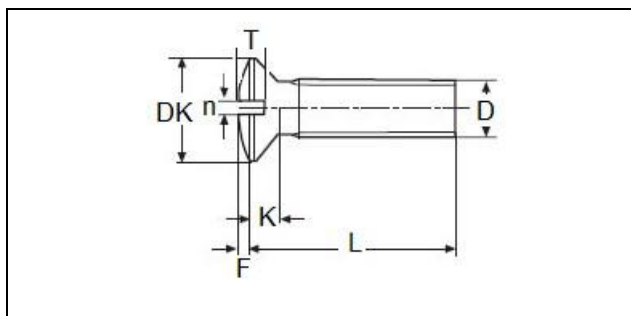

Thread d		M1	M1.2	M1.4	M1.6	M2	M2.5	M3	(M3.5)	M4	M5	M6	M8	M10
P		0.25	0.25	0.3	0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5
A	max.	0.5	0.5	0.6	0.7	0.8	0.9	1	1.2	1.4	1.6	2	2.5	3
B	min.	full thread			15	16	18	19	20	22	25	28	34	40
DK	nominal	1.9	2.3	2.6	3	3.8	4.7	5.6	6.5	7.5	9.2	11	14.5	18
	max.	1.76	2.06	2.46	2.86	3.5	4.4	5.3	6.14	7.14	8.84	10.57	14.07	17.5
F	approx.	0.25	0.3	0.35	0.4	0.5	0.6	0.75	0.9	1	2.5	3	4	5
K	max.	0.6	0.72	0.84	0.96	1.2	1.5	1.65	1.93	2.2	1.25	1.5	2	2.5
n	Nominal	0.25	0.3	0.3	0.4	0.5	0.6	0.8	0.8	1	1.2	1.6	2	2.5
	min.	0.31	0.36	0.36	0.46	0.56	0.66	0.86	0.86	1.06	1.26	1.66	2.06	2.56
	max.	0.45	0.5	0.5	0.6	0.7	0.8	1	1	1.2	1.51	1.91	2.31	2.81
r	max.	0.1	0.12	0.14	0.16	0.2	0.25	0.3	0.35	0.4	0.5	0.6	0.8	1
rf	approx.	2	2.5	3	3	4	5	6	7	8	10	12	16	20
T	min.	0.4	0.5	0.52	0.65	0.8	1	1.2	1.4	1.6	2	2.4	3.2	4
	max.	0.5	0.6	0.65	0.8	1	1.2	1.45	1.7	1.9	2.3	2.8	3.7	4.6
X	max.	-	-	-	0.9	1	1.1	1.25	1.5	1.75	2	2.5	3.2	3.8

All measurements are in mm



Metric DIN 964 is a slotted drive raised countersunk (oval) head machine screws. Metric machine screws are designed for metal to metal applications requiring a pre-drilled hole and a mating metric nut or the screw to thread into. These screws are usually fully threaded with machine threads and blunt point. The recommended pre-drilled hole sizes vary, depending on the diameter of the screw to be used but should be slightly larger in diameter than the major (maximum) thread diameter.

These screws are available in zinc plated steel as well as stainless steel A2 and A4. Metric The raised countersunk (oval) heads are countersunk heads with a rounded domed top surface and a cone-shaped bearing surface having a head angle of approximately 80°. They are preferred over standard flat countersunk heads in applications when a more decorative finished look is desired. Unique Fasteners offers over 500.000 unique fastener products from stock in inch and metric standard in a variety of materials and finishes. The following sizes metric DIN 964 slotted drive raised countersunk (oval) head machine screws are available for immediate shipping from stock: Diameters ranging from M1.6 to M10 up to 38mm long in zinc plated steel and stainless steel A2 and A4.

[illegible]

GSTIN- 29ADMPC3767H1Z9



UNIQUE FASTENERS

Precision Fasteners, Built to Last
175/6 Sar Building, Sp Road, Bangalore, 560002



+91-8660813791



uniquefasteners.in



INFO@UNIQUEFASTENERS.IN

