



+91-8660813791

UNIQUE FASTENERS

Precision Fasteners, Built to Last
175/6 Sar Building, Sp Road, Bangalore, 560002

uniquefasteners.in


INFO@UNIQUEFASTENERS.IN



Product Dimensions and Weights

DIN 965 ISO 7046 Specifications

Metric DIN 965 Cross Recessed (Phillips) Flat Countersunk Machine Screws

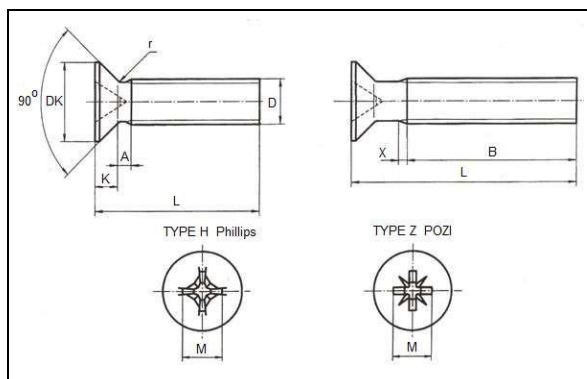

Dimensions of Metric DIN 965 Cross Recessed (Phillips) Flat Countersunk Machine Screws

Thread d				M1.6	M2	M2.5	M3	(M3.5)	M4	M5	M6	M8	M10
P				0.35	0.4	0.45	0.5	0.8	0.7	0.8	1	1.25	1.5
A	max.			0.7	0.8	0.9	1	1.2	1.4	1.6	2	2.5	3
B	min.			15	16	18	19	20	22	25	28	34	40
DK	nominal max.			3	3.8	4.7	5.6	6.5	7.5	9.2	11	14.5	18
	min.			2.75	3.5	4.4	5.3	6.14	7.14	8.84	10.57	14.07	17.57
K	max.			0.96	1.2	1.5	1.65	1.93	2.2	2.5	3	4	5
r	max.			0.4	0.5	0.7	0.8	0.95	1	1.3	1.6	2	2.5
X	max.			0.9	1	1.1	1.25	1.5	1.75	2	2.5	3.2	3.8
Cross recess	no.			0	1	1	1	2	2	2	3	4	4
	type H	M	approx.	1.7	2.35	2.7	2.9	3.9	4.4	4.6	6.6	8.7	9.6
		penetration depth	min.	0.66	0.95	1.25	1.5	1.4	1.9	2.1	2.8	3.9	4.8
			max.	0.91	1.25	1.55	1.8	1.9	2.4	2.6	3.3	4.4	5.3
	type Z	M	approx.	1.8	2.2	2.5	2.8	3.7	4	4.4	6.1	8.5	9.4
		penetration depth	min.	0.89	0.92	1.22	1.48	1.34	1.6	2.05	2.46	3.86	4.77
			max.	1.14	1.17	1.47	1.73	1.8	2.06	2.51	2.92	4.32	5.23

Weight of Metric DIN 965 Cross Recessed (Phillips) Flat Countersunk Machine Screws

[illegible]